

# S SERIES

Interactive Floor LED Screens



**Immersive Custom Experiences  
Indoor and Outdoor  
High Resistance**



# S SERIES

## Interactive Floor LED Screen



**1,5 T/m<sup>2</sup>**  
High resistance



**P1.56 - P8.928**  
Wide pitch range



**78 mm**  
Ultra-thin



**3.840 Hz**  
High refresh rate



**128 chips/m<sup>2</sup>**  
Sensitive smart chip



**100.000 hours**  
Long service life




**Standard cabinet design**  
Quick and seamless splice any screen size



**Ultra-thin screen box**  
18 mm thickness



**Module**

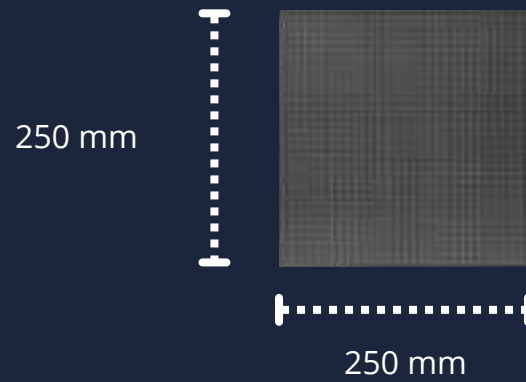

**Easy installation and maintenance**



Lightweight modular system

Front service



**Top resistance**  
GOB technology  
Up to 1,5 Tons/m<sup>2</sup> beared


**Available for stairs**  
Specific cabinet design  
Antidazzling finish

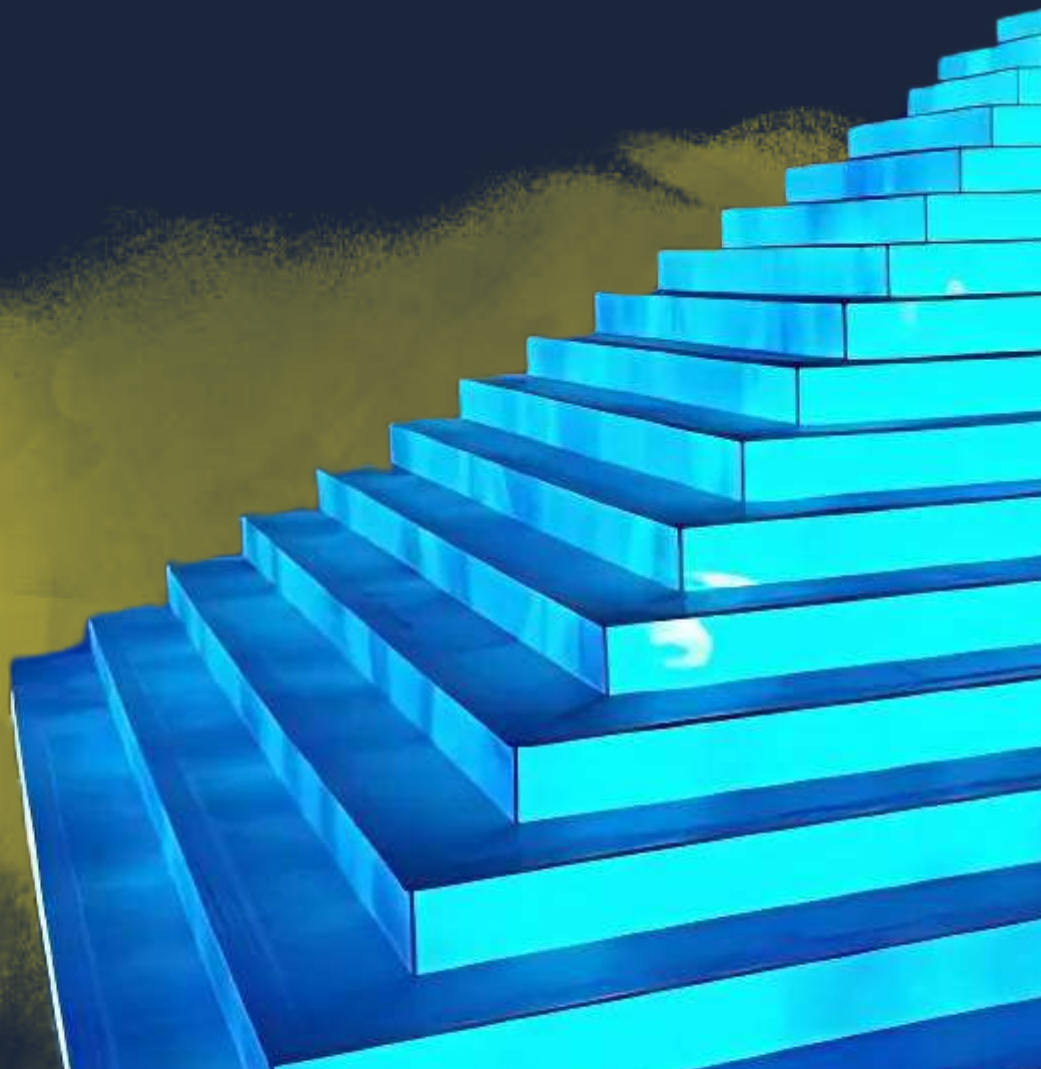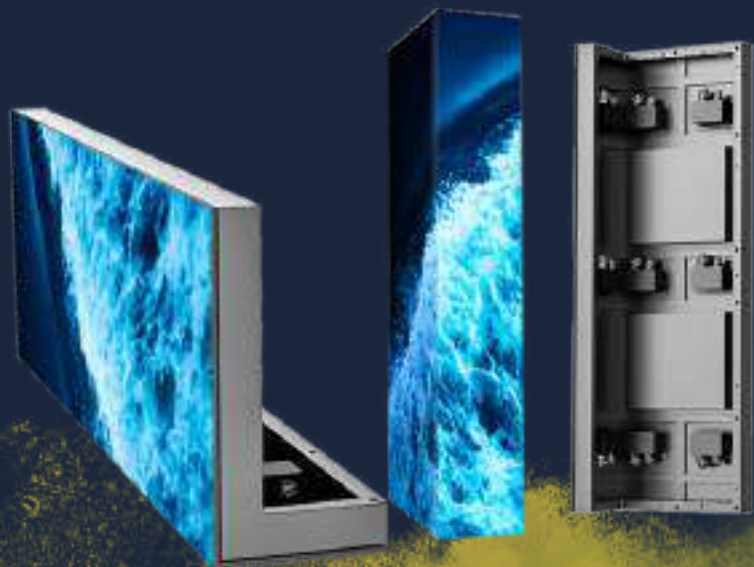

**Specific cabinet design**  
Quick and seamless splice custom sizes



**Module**

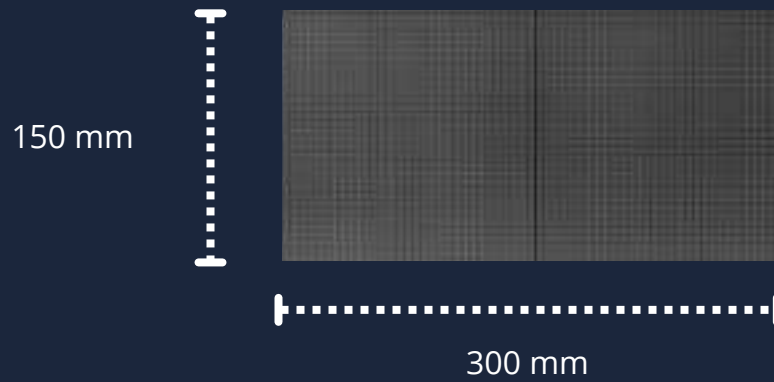

**Inmersive Solutions**  
Floor and Wall Connection  
Reality effect without AR glasses



# S SERIES

## Interactive Floor LED Screen



Pixel Pitch (mm)	P1.56	P1.86	P1.95	P2.5	P2.604	P2.976	P3.91	P4.81	P5.2	P6.25	P7.8125	P8.928	
	Indoor						Indoor / Outdoor				Outdoor		
Module Size (mm)	250*250						250*250						
Cabinet Size (mm)	500 × 500			500*500 / 500*1.000									
Cabinet Weight (kg)	44						44 / 50						
Thickness (mm)	78												
Beared Weight (T)	0,8				1,5								
Pixel Density (dots/m <sup>2</sup> )	409.600	287.296	262.144	160.000	147.456	112.896	65.536	43.264	36.864	25.600	16.384	12.544	
Module Resolution (dots)	160*160	134*134	128*128	100*100	96*96	84*84	64*64	52*52	48*48	40*40	32*32	28*28	
Brightness (nits)	600			1.300			Indoor 1.300 / Outdoor 3.000			Indoor 1.000 / Outdoor 3.000		1.300	1.300
Refresh Rate (Hz)	3.840												
Pixel Composition	1R1G1B												
Protection	IP54						Indoor IP54 / Outdoor IP67				IP67		
Temperature (°C) / Humidity (% RH)	-20 ~ 65 / 10 ~ 90												
Operating Time (hours)	≥ 10.000												
Life Span (hours)	≥100.000												
Installation Method	Cabinets includes ground support												
Maintenance Method	Front												



# S SERIES


## Interactive Stairs LED Screen



<b>Pixel Pitch (mm)</b>	<b>P4.68</b>
Module Size (mm)	300*150
Cabinet Size (mm)	900 *(300+150)
Thickness (mm)	78
Beared Weight (T)	1,5
Pixel Density (dots/m <sup>2</sup> )	45.369
Module Resolution (dots)	64*32
Brightness (nits)	1.300
Refresh Rate (Hz)	3.840
Pixel Composition	1R1G1B
Protection	IP54
Temperature (°C) / Humidity (% RH)	-20 ~ 55 / 10 ~ 90
Operating Time (hours)	≥ 10.000
Life Span (hours)	≥100.000

# S SERIES

Interactive Floor LED Screen

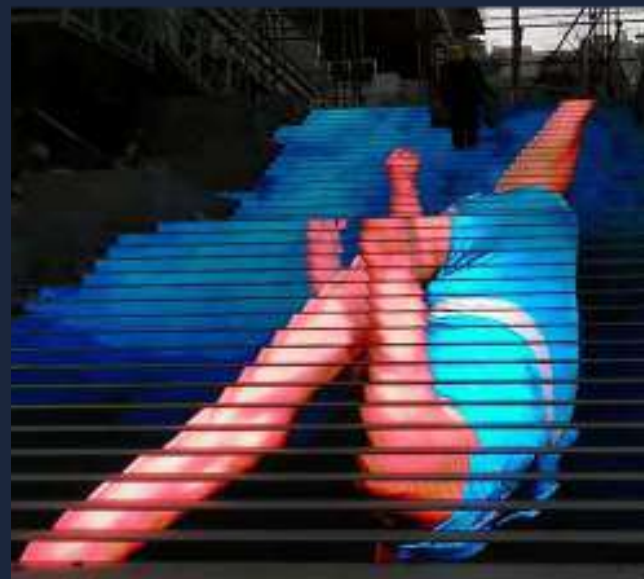



[www.pantallasledlearoy.com](http://www.pantallasledlearoy.com)

C/ Valdeon 24 - 28947 Fuenlabrada, Madrid (Spain)  
+34 620 411 079 / +34 91 615 89 81  
[contacto@learoyled.com](mailto:contacto@learoyled.com)

