

# TO SERIES

LED Totems



High Visibility  
Indoor  
Smart Design



# TO-L SERIES

LED Totem



**GOB available**  
Maximum resistance



**40 kg**  
Lightweight



**39 mm**  
Ultra-thin screen



**160°**  
Wide viewing angle



**1.000 nits**  
High brightness




**100.000 hours**  
Long service life



### Standard design

Two screen sizes available

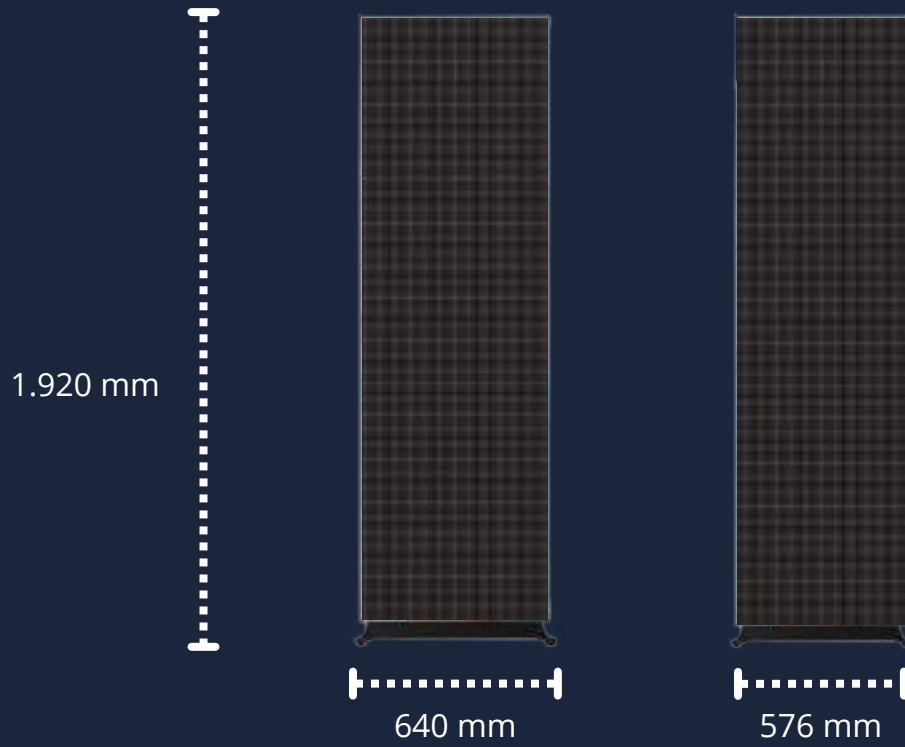


### Ultra-thin screen box

39 mm thickness



### Module

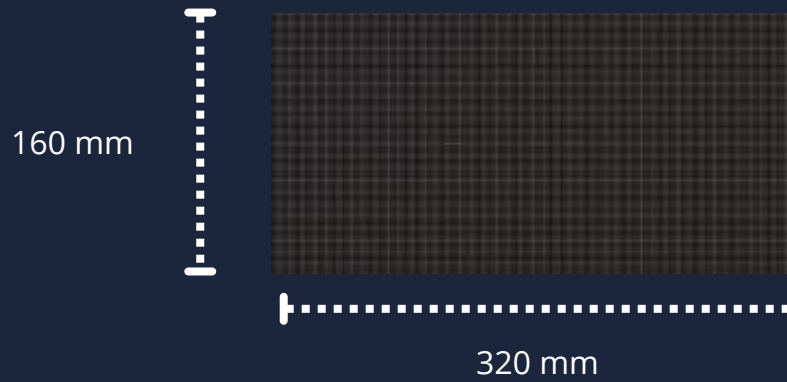

## Functional and robust design

Two standing designs available

Versatile connectivity

Resistant acrylic board





### Variety of installation methods

- Cascade connection available
- Hanging installation possible



### Easy maintenance

- Front service
- Magnetic suction modules



# TO-L SERIES

## LED Totem

RoHS



ISO  
9001

ISO  
14001

Pixel Pitch (mm)	P1.25	P1.86	P2.5
Module Size (mm)	320*160		
Screen Size (mm)	640*1.920		
Weight (kg/m <sup>2</sup> )	40		
Thickness (mm)	39		
Pixel Density (dots/m <sup>2</sup> )	640.000	287.296	160.000
Module Resolution (dots)	128* 64		
Brightness (nits)	1,000		
Refresh Rate (Hz)	1,920		
LED Lamp	SMD1515		
Viewing Angle (°)	H 160, V 160		
Viewing Distance (m)	≥ 1		
Protection	IP43		
Temperature (°C) / Humidity (% RH)	-30 ~ 60 / 10 ~ 95		
Input Voltage	AC 96~242V 50/60Hz		
Maximun / Average Power Consumption (W/m <sup>2</sup> )	800 / 300		
Life Span (hours)	≥ 100.000		
Installation Method	Floor standing with casters or hanging. Cascade connection possible		
Connectivity	WiFi, USB, HDMI		
Maintenance Method	Front with magnetic		



# TO-L SERIES



LED Totem





[www.pantallasledlearoy.com](http://www.pantallasledlearoy.com)

C/ Valdeon 24 - 28947 Fuenlabrada, Madrid (Spain)  
+34 620 411 079 / +34 91 615 89 81  
[contacto@learoyled.com](mailto:contacto@learoyled.com)

