

K SERIES

Self-service LCD Kiosks



Dual Screen
Outdoor
High Brightness



KP SERIES

Self-payment LCD Kiosk



1080p HD
FHD quality image



10 touch points
Sensitive and fast



Compact design
Slim and lightweight



178°
Wide viewing angle



1000:1
High contrast




50.000 hours
Long service life



Functional design

Wall mounted, desktop or floor standing

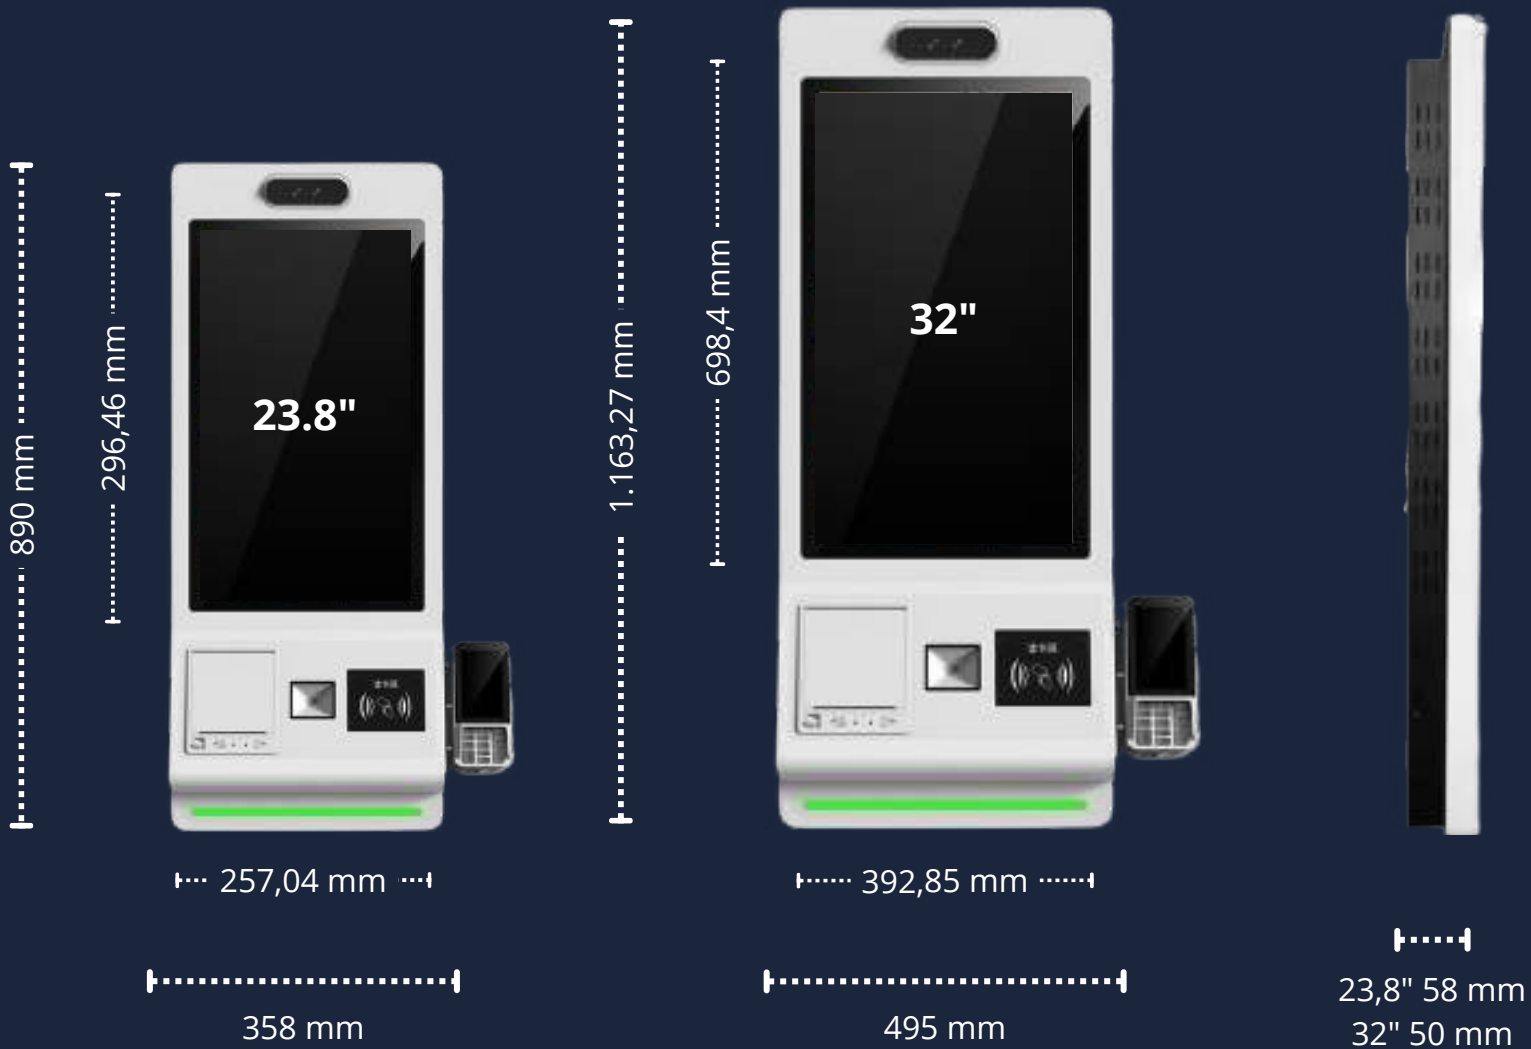

User friendly

- Simple ordering steps
- QR / barcode scanner
- Built-in speaker

Easy maintenance

- Thermal printer with easy paper replacement
- Security locks



KP SERIES

Self-payment LCD Kiosk



Screen Size (inch)	23,8	32
Screen Size (mm)	257,04 x 296,46	698,4 x 392, 85
Total Size (mm)	890 x 358	1.163,27 x 495
Weight (kg)	16,5	
Thickness (mm)	58	50
Resolution	1920x1080	
Brightness(nits)	250	
Contrast	1000:1	
Viewing Angle (°)	H 178, V 178	
RAM / ROM (GB)	2 / 8	
Operating System	RK3288 QuadCore 1.8GHzAndroid 7.0	
Connectivity	WiFi, cable de red, 2xUSB, RJ45	
Temperature (°C) / Humidity (% RH)	-0 ~50 / 10 ~80	
Input Voltage (V/Hz)	AC 100V~220V	
Consumption (W)	45	55
Life Span (hours)	50.000	
Shell and Cover Material	Black / White / Custom metal and 3mm tempered glass	
Installation Method	Wall mounted, desktop or floor standing	

KP SERIES

Self-payment LCD Kiosk



KC SERIES

Self-service drive through LCD Kiosk



1080p HD

FHD quality image



2.000 nits

High brightness



IP55

High protection



178°

Wide viewing angle



1200:1

High contrast



50.000 hours

Long service life



Dual screen
TFT and LCD 55"





178°



Maximum stability and resistance

Waterproof, dustproof, sun and cold resistant
Strong construction withstand hurricane wind force
6 mm tempered glass


Easily readable content

High brightness
Ambient light sensor
Wide viewing angle



KC SERIES

Self-service drive through LCD Kiosk



Screen Size (inch)	2x55
Screen Size (mm)	1.210 x 1.410
Total Size (mm)	1.940 x 1.492
Thickness (mm)	250
Resolution	1.920 x 1.080
Brigtness(nits)	2.000
Contrast	1200:1
Viewing Angle (°)	H 178, V 178
RAM / ROM (GB)	4 / 128
Operating System	I3 Windows 10
Connectivity	WiFi, ethernet, 4xUSB
Protection	IP55
Temperature (°C) / Humidity (% RH)	-0 ~50 / 5 - 90
Input Voltage (V/Hz)	100-240V
Consumption (W)	750
Life Span (hours)	30.000
Shell and Cover Material	Metal and 6mm tempered glass
Installation Method	Vertical



KC SERIES

Self-service drive through LCD Kiosk





www.pantallasledlearroy.com

C/ Valdeon 24 - 28947 Fuenlabrada, Madrid (Spain)
+34 620 411 079 / +34 91 615 89 81
contacto@learoyled.com

