

S SERIES

Interactive Floor LED Screens



**Immersive Custom Experiences
Indoor
High Resistance**



S SERIES

Interactive Floor LED Screen



1,5 T/m²
High resistance



P1.56 - P6.25
Wide pitch range



78 mm
Ultra-thin



3.840 Hz
High refresh rate



128 chips/m²
Sensitive smart chip




100.000 hours
Long service life




Standard cabinet design
Quick and seamless splice any screen size



Ultra-thin screen box
18 mm thickness

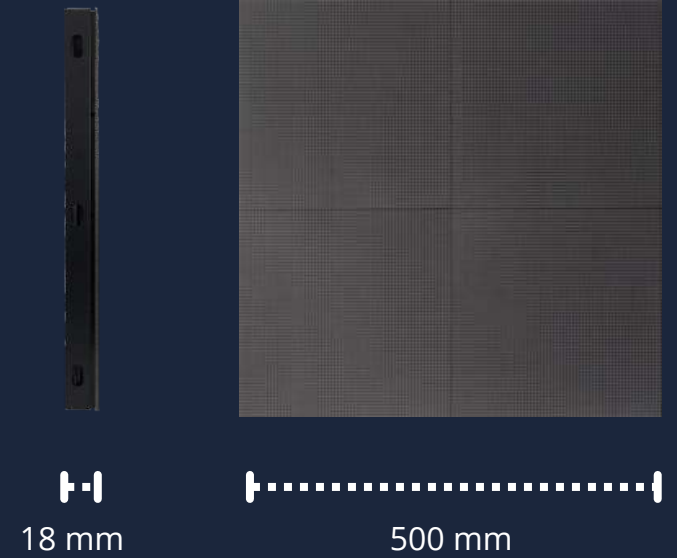

Module

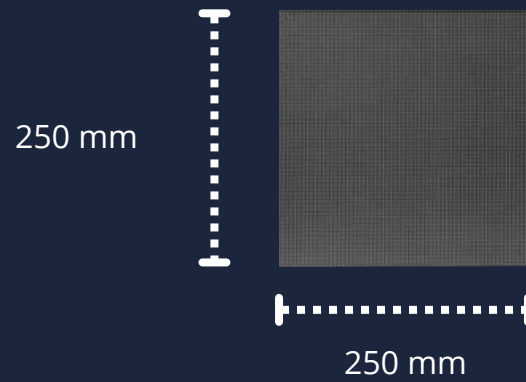

Easy installation and maintenance

Lightweight modular system



Front service



Top resistance
GOB technology
Up to 1,5 Tons/m² beared




Available for stairs
Specific cabinet design
Antidazzling finish

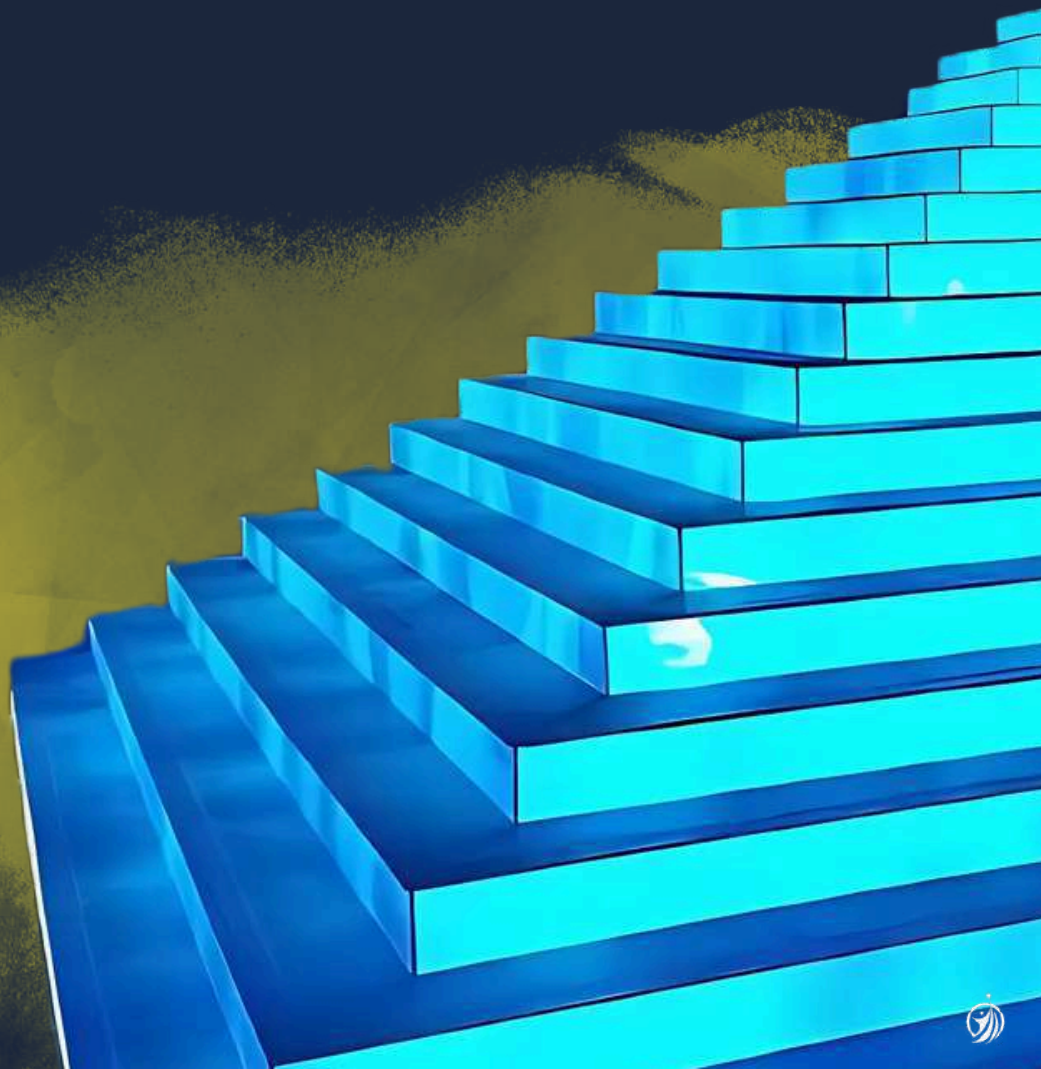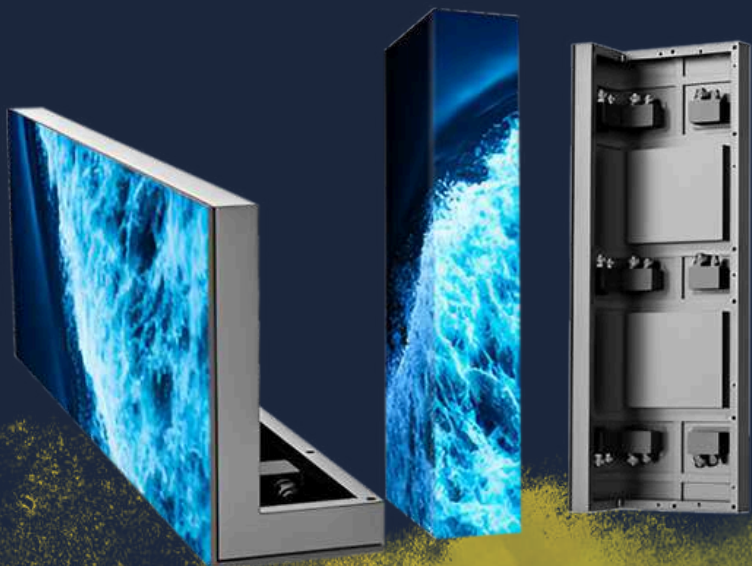

Specific cabinet design
Quick and seamless splice custom sizes



Module

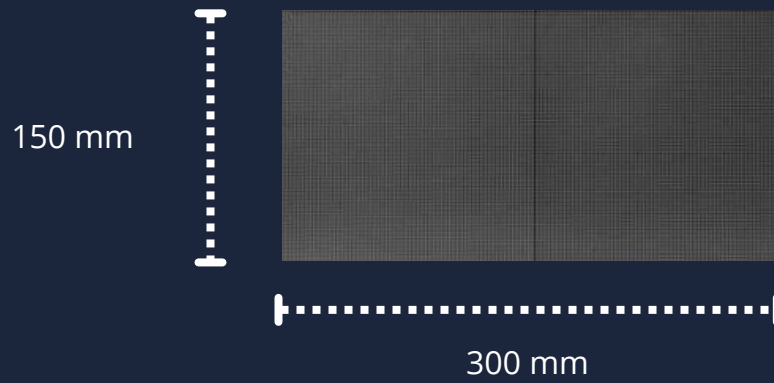


Immersive Solutions
Floor and Wall Connection
Reality effect without AR glasses



S SERIES

Interactive Floor LED Screen

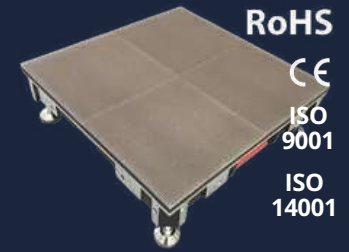

Pixel Pitch (mm)	P1.56	P1.86	P1.95	P2.5	P2.604	P2.976	P3.91	P4.81	P5.2	P6.25	
Module Size (mm)	250*250										
Cabinet Size (mm)	500 × 500			500*500 / 500*1.000							
Cabinet Weight (kg)	44						44 / 50				
Thickness (mm)	78										
Beared Weight (T)	0,8				1,5						
Pixel Density (dots/m ²)	409.600	287.296	262.144	160.000	147.456	112.896	65.536	43.264	36.864	25.600	
Module Resolution (dots)	160*160	134*134	128*128	100*100	96*96	84*84	64*64	52*52	48*48	40*40	
Brightness (nits)	600			1.300						1.000	
Refresh Rate (Hz)	3.840										
Pixel Composition	1R1G1B										
Protection	IP54										
Temperature (°C) / Humidity (% RH)	-20 ~ 65 / 10 ~ 90										
Operating Time (hours)	≥ 10.000										
Life Span (hours)	≥100.000										
Installation Method	Cabinets includes ground support										
Maintenance Method	Front										



S SERIES

Interactive Stairs LED Screen





Pixel Pitch (mm)	P4.68
Module Size (mm)	300*150
Cabinet Size (mm)	900 *(300+150)
Thickness (mm)	78
Beared Weight (T)	1,5
Pixel Density (dots/m ²)	45.369
Module Resolution (dots)	64*32
Brightness (nits)	1.300
Refresh Rate (Hz)	3.840
Pixel Composition	1R1G1B
Protection	IP54
Temperature (°C) / Humidity (% RH)	-20 ~ 55 / 10 ~ 90
Operating Time (hours)	≥ 10.000
Life Span (hours)	≥100.000



S SERIES

Interactive Floor LED Screen

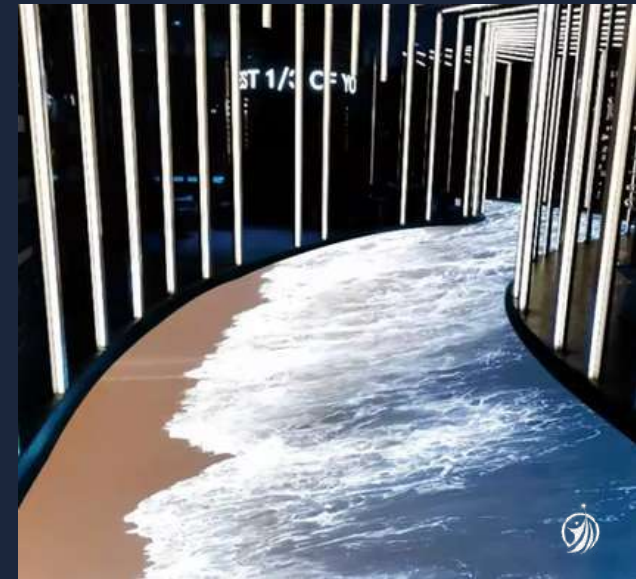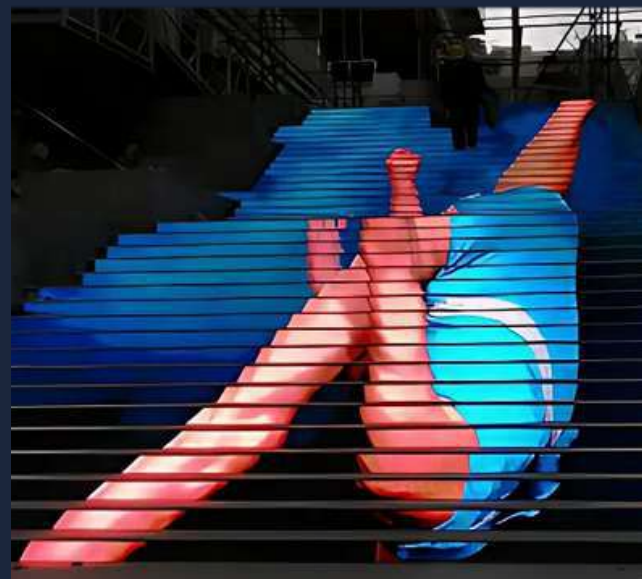



www.pantallasledlearroy.com

C/ Valdeon 24 - 28947 Fuenlabrada, Madrid (Spain)
+34 620 411 079 / +34 91 615 89 81
contacto@learoyled.com

