

R SERIES

Rental LED Display



**Wide Applications Range
Indoor and Outdoor
Top Resistance**



RF SERIES

Carbon Fiber Rental LED Display



IP43-65

High protection



6,9 kg / cabinet

Super lightweight



20 mm

Ultra-thin



3.840 Hz

High refresh rate



5.000 nits

Top brightness




100.000 hours

Long service life




Standard cabinet design
Quick and seamless splice any screen size

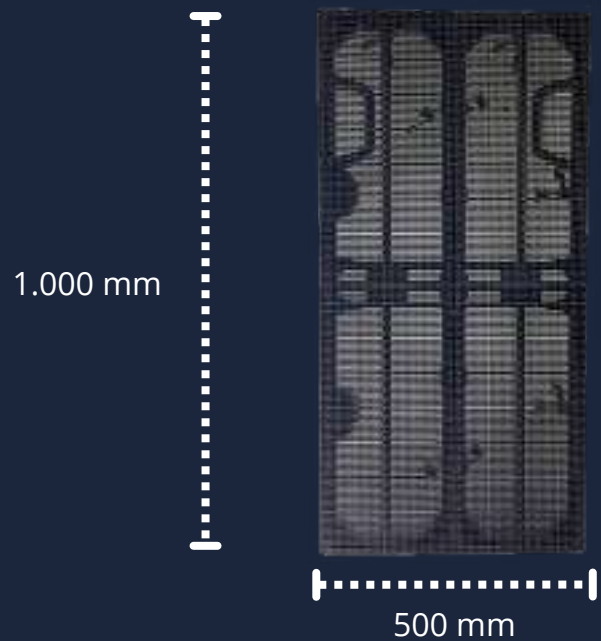

Ultra-thin screen box
20 mm thickness



Module

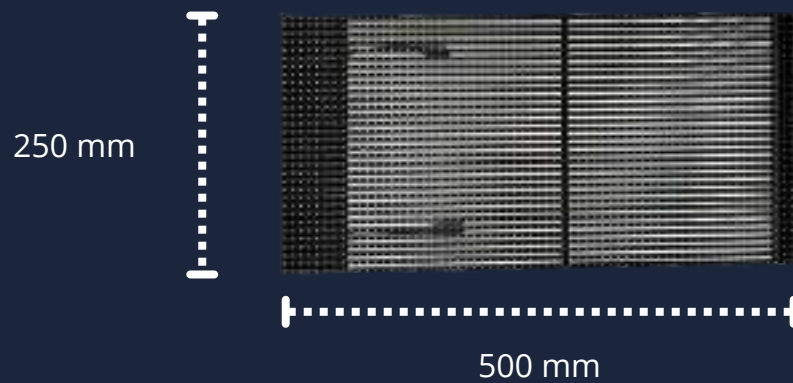

Easy installation


Ultra-lightweight modular system

Quick cabinets lock-in design

Hanging or stacking installation



Easy maintenance
Front or rear service
Removable modules

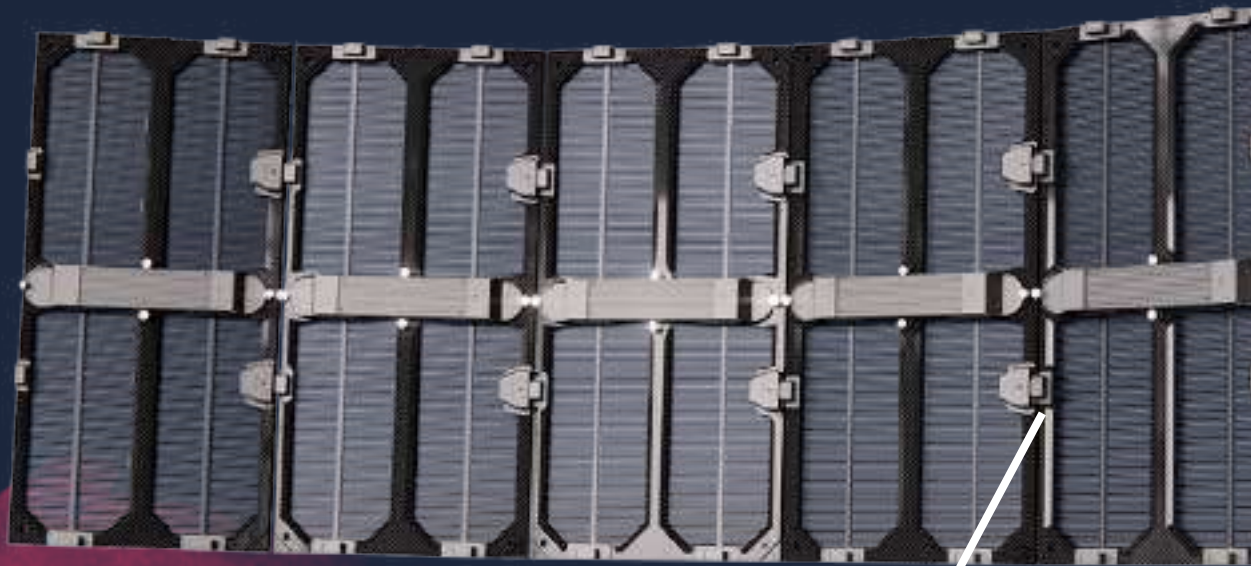

Curvable Screen
Optional curved cabinets connection
Angle between cabinets

RF SERIES

Carbon Fiber LED Display



Pixel Pitch (mm)	Outdoor P2.9	Outdoor P3.9	Outdoor P5.2	Outdoor P6.9	Indoor P2.6	Indoor P2.9	Indoor P3.9
Module Size (mm)	250*500						
Cabinet Size (mm)	500*1.000						
Cabinet Weight (kg)	6,9						
Thickness (mm)	20						
Pixel Density (dots/m²)	112.896	65.536	36.864	20.736	147.456	112.896	65.536
Module Resolution (dots)	84*168	64*128	48*96	36*72	96*192	84*168	64*128
Brightness (nits)	≥ 5.000				1.000		
Refresh Rate (Hz)	3.840						
Gray Scale (bits)	14 ~ 16						
Pixel Composition	1R1G1B						
LED Lamp	SMD1415	SMD1921			SMD1515	SMD2020	
Protection	IP65				IP43		
Viewing Angle (°)	H 140, V 140						
Viewing Distance (m)	≥ 3		≥ 5	≥ 7	≥ 3		
Temperature (°C) / Humidity (% RH)	-10 ~ 65 / 10 ~ 90						
Input Voltage	AC 86 - 264V/60Hz						
maximum / Average Power Consumption (W/m²)	800 / 280						
Operating Time (hours)	≥ 10.000						
Life Span (hours)	≥100.000						
Cabinet Material	Carbon fiber						
Installation Method	Hanging/truss (30 metres height maximum)						
Maintenance Method	Front or rear						

RA SERIES

Aluminum Rental LED Display



IP65

High protection



7,5 kg / cabinet

Super lightweight



Curvable

Angle system



7.680 Hz

Top refresh rate



700-5.500 nits

Top brightness





100.000 hours

Long service life



Standard cabinet design
Quick and seamless splice any screen size
Two cabinet sizes available

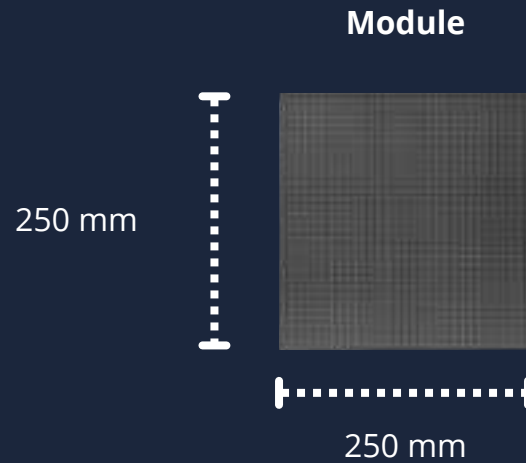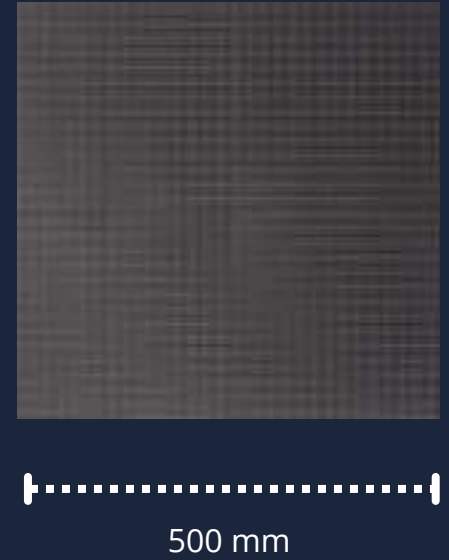


Quick and simple installation

Lightweight modular system

Quick cabinets lock-in design

Hanging or stacking installation

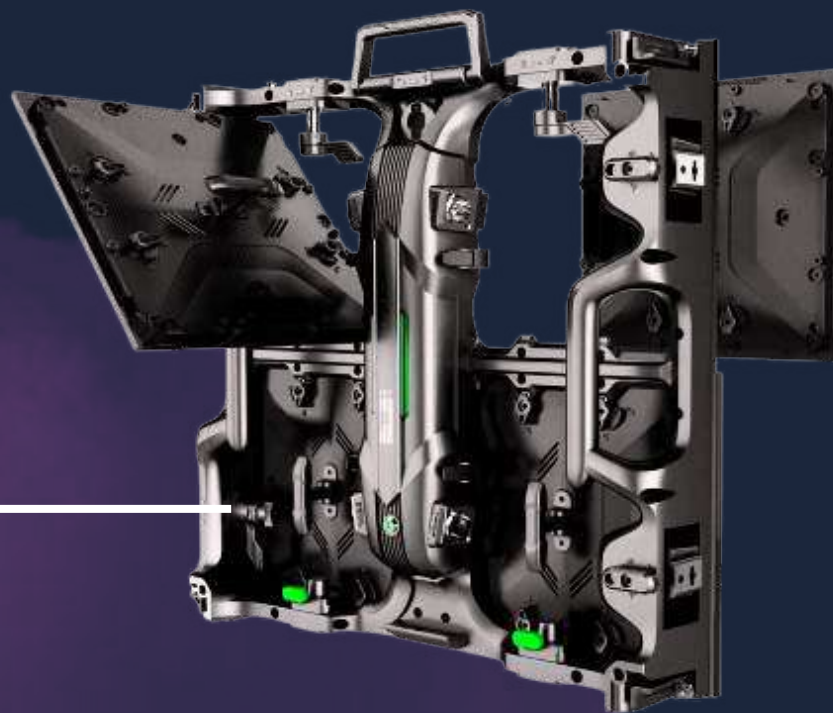

Easy maintenance

Front or rear service

Removable modules



RC-PRO



RC-A



RC-L




RC-H



RC-K

Curvable Screen

Optional curved cabinets connection
Regulable angle between cabinets

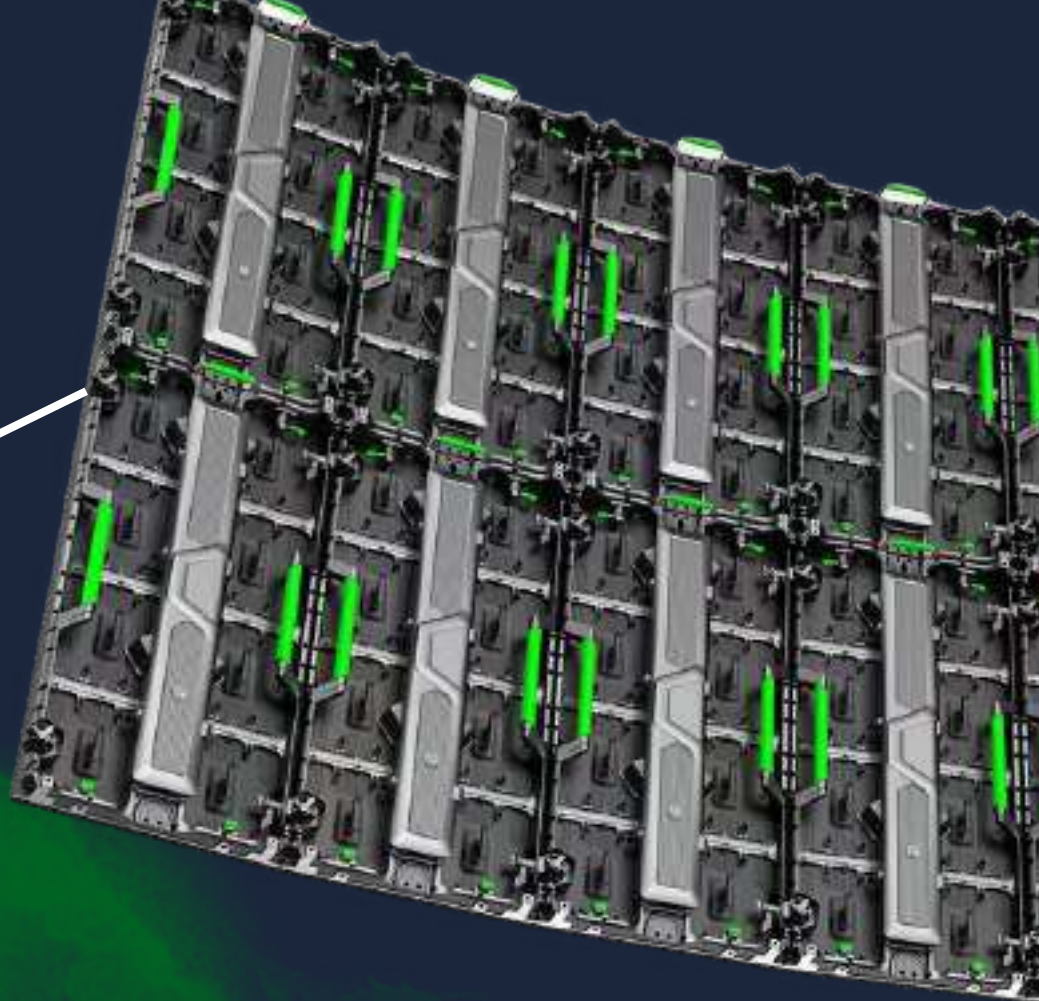

Multiple designs

Straight angles or concave or convex curves
Wide range of shapes

RA SERIES

Aluminum Rental LED Display



Pixel Pitch (mm)	Outdoor P2.976	Outdoor P3.91	Outdoor P4.81	Indoor P2.604	Indoor P2.976	Indoor P3.91	Indoor P4.81
Module Size (mm)	250 x 250						
Cabinet Size (mm)	500 × 500 / 500 x 1.000						
Cabinet Weight (kg)	7,5 / 15						
Thickness (mm)	100						
Pixel Density (dots/m²)	112.896	65.536	43.264	147.456	112.896	65.536	43.264
Module Resolution (dots)	84 x 84	64 x 64	52 x 52	96 x 96	84 x 84	64 x 64	52 x 52
Brightness (nits)	700 - 5.500						
Refresh Rate (Hz)	7.680						
Pixel Composition	1R1G1B						
Scan	21	16	13	24	21	16	13
Protection	IP65						
Refresco (Hz)	-10 ~ 45 / 10 ~ 80						
Operating Time (hours)	≥ 10.000						
Life Span (hours)	≥ 100.000						
Input Voltage	220V±10%; AC50 Hz						
Installation Method	Stacking or hanging/truss. It can be slightly curved.						
Maintenance Method	Front or rear						

R SERIES

Rental LED Display



RC SERIES

Curved Rental LED Display



IP65

High protection



0,5 kg / panel

Super lightweight



Curved

Convex or concave



170°

Wide viewing angle



5.000 nits

High brightness





100.000 hours

Long service life



Standard cabinet design
Quick and seamless splice any screen size
Two cabinet sizes available

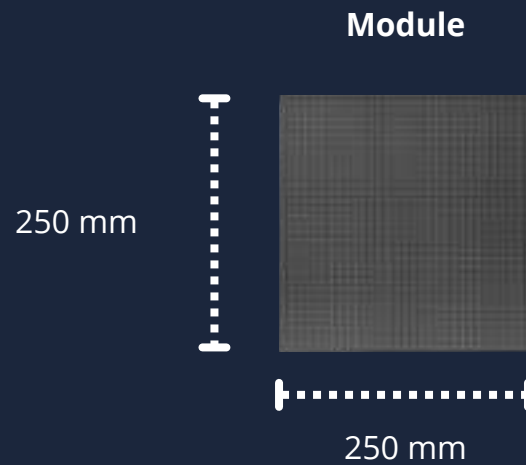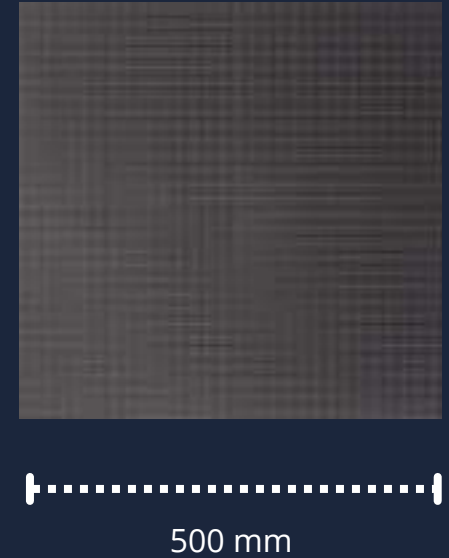

Quick and simple installation

Lightweight modular system

Quick cabinets lock-in design

Hanging or stacking installation



RC SERIES

Curved Rental LED Display



Pixel Pitch (mm)	P3.91
Module Size (mm)	250 x 250
Cabinet Weight (kg)	0,5
Pixel Density (dots/m²)	65.536
Module Resolution (dots)	64 x 64
Brightness (nits)	4.500-5.000
Refresh Rate (Hz)	1.000 - 1.920
Pixel Composition	1R1G1B
Scan	16
Protection	IP65
Viewing Angle (°)	H 170, V 120
Refresco (Hz)	-20 ~ 60 / 10 ~ 95
Operating Time (hours)	≥ 10.000
Life Span (hours)	≥ 100.000
Input Voltage	220V/50-60 Hz
Installation Method	Stacking or hanging/truss
Maintenance Method	Front or rear





www.pantallasledlearoy.com

C/ Valdeon 24 - 28947 Fuenlabrada, Madrid (Spain)
+34 620 411 079 / +34 91 615 89 81
contacto@learoyled.com

